


CATM INSTALLATION GUIDE

APPLIES TO MODELS V878C CATM




1

Remove the two small screw under the seat pan as shown above. These prevent the cushion from coming off.

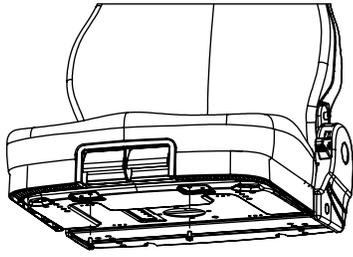


2

Slide the cushion all the way forward, then lift it up and off.

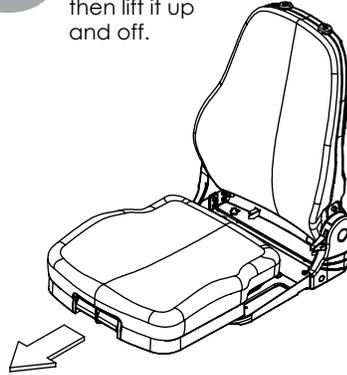

3

Slide the seat pan forward and back to access the mounting holes to install the OEM CAT bracket.

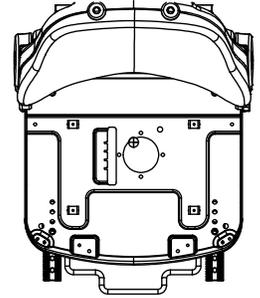

NOTE: TEMPORARILY REMOVE SEAT CUSHION TO ACCESS


FRONT HOLES IN SLIDE RAILS.

NOTE: CAT PARTS NOT INCLUDED WITH SEAT. REUSE PARTS FROM OLD SEAT

NOTE: CAT PARTS NOT TO SCALE AND ONLY SHOWN FOR REPRESENTATION PURPOSES

CAT PART NO. 283-8339 (FRONT CONSOLE)

CAT PART NO. 283-8340 (REAR CONSOLE)

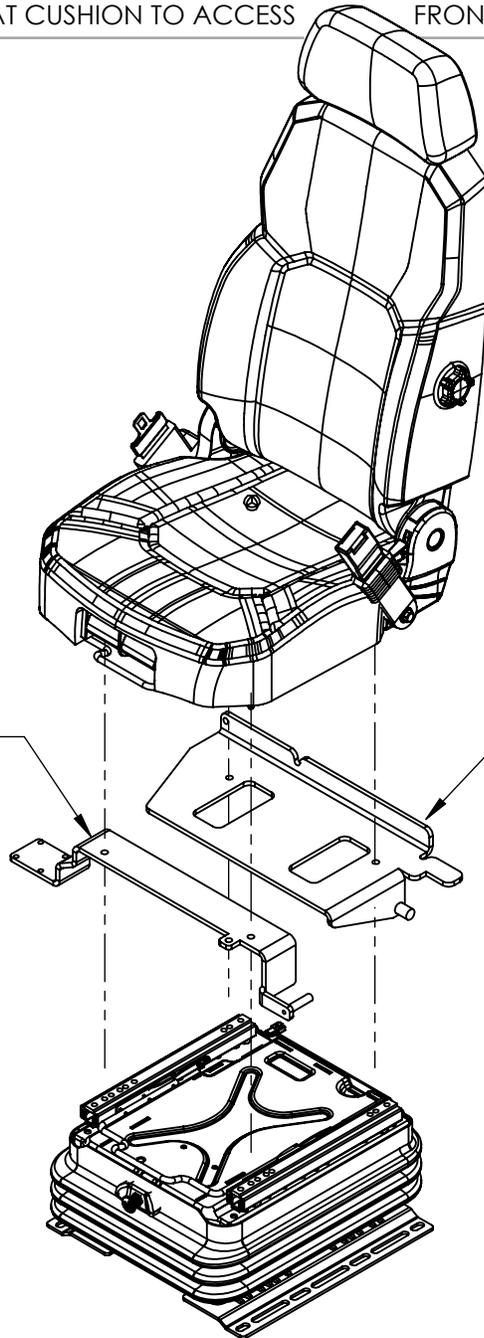

SCAN FOR GUIDES



Guides also available at:
<https://www.ultraseat.com/downloads>

Part# 580394C24